


PRESINOX 14800 VALVULA

GAS CONNECTORS



Fixed or mobile
appliances gas



Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure
12	20 mm	12 mm	08 mm	>0.8 m ³ /h	with no limit	0,5 bar


H2o potable: No

FITTINGS

Dn	Nut G	Valve R	Male R
-	1/2"	1/2"	1/2"



MATERIALS

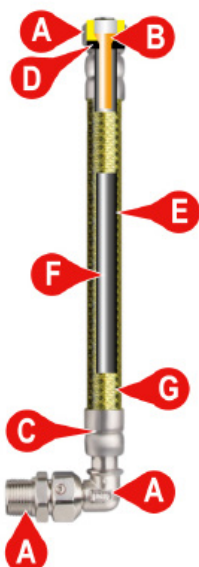

- A. Brass
- B. Brass
- C. Stainless steel
- D. Incorporated EPDM
- E. Poliolefine
- F. Stainless steel

PRESINOX 14800 VALVULA Rev. 01