

Galvanized steel connector

# RIVER

(DN13, DN50)



主要适用于水泵类以及其他工业设备。

采用镀锌钢编织材料。如果在强腐蚀性的使用环境中使用，建议采用特殊检测设备帮助及时发现受损产品。


**Flexible hoses for pumps and other industrial applications.**

*By having galvanised steel braid, the installation requires special supervision in order to be able to detect any deterioration of the braiding by corrosive agents.*



## 应用 Applications

Pumps and other industrial applications

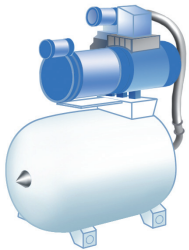

## 技术参数 Characteristics and technical specifications




Dn	Nut G	Male G	Elbow
13	1/2"	1/2"	1/2"
19	3/4"	3/4"	3/4"
25	1"	1"	1"
30	1 1/4"	1 1/4"	-
40	1 1/2"	1 1/2"	-
50	2"	2"	-

## 接头 Fittings

Dn	外径 Outer diameter	内径 Inner diameter	内孔直径 Fitting inner diameter	3巴压力下水流量 Flow rate	最小弯曲度 Minimum bending radius	最大工作压力 Working pressure	最高工作温度 Working temperature
13	19 mm	13 mm	9,5 mm	65 l/min at 3 bar	45 mm	12 bar	90 °C
19	27 mm	19 mm	15 mm	120 l/min at 3 bar	80 mm	12 bar	90 °C
25	33 mm	25 mm	20 mm	200 l/min at 3 bar	100 mm	10 bar	110 °C
30	42 mm	30 mm	25 mm	400 l/min at 3 bar	190 mm	9 bar	110 °C
40	52 mm	40 mm	32 mm	700 l/min at 3 bar	230 mm	8 bar	110 °C
50	62 mm	50 mm	40 mm	1050 l/min at 3 bar	300 mm	7 bar	110 °C

## 材料 Materials

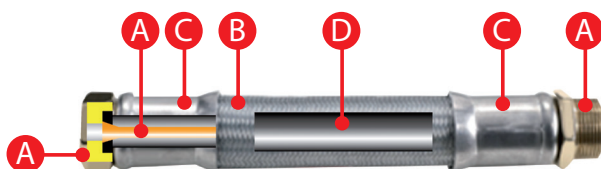

- A** 铜合金/Brass
- B** 镀锌钢/Galvanized steel
- C** 美标304/Stainless steel AISI304
- D** EPDM