

SUPER FLEXO BRASS

SHOWER HOSES



Showers



Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS


Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
-	14 mm	7,5 mm	6 mm	26 lit/mit at 3 bar	37 mm	5 bar	70°C

H2o potable: yes

FITTINGS

Dn	Conical Nut G	Rounded Nut G
-	1/2"	1/2"

MATERIALS

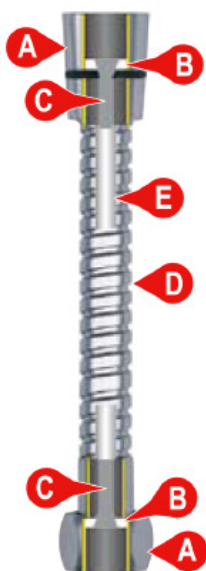

- A. Chrome-plated brass
- B. Plastic
- C. Brass
- D. Chrome-plated brass
- E. PVC

SUPER FLEXO BRASS Rev. 01