


# TAQ ACB DN8

## POLYMER CONNECTOR



Sanitary application

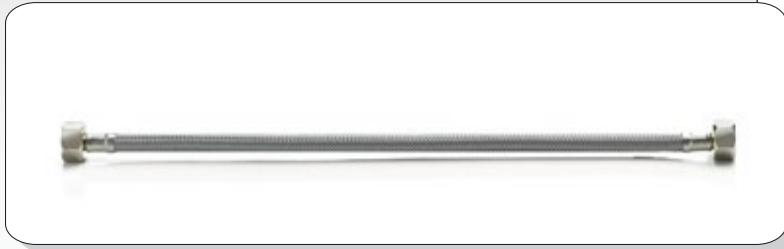

Applications

### CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
8	12 mm	08 mm	06 mm	28 lit/mit at 3 bar	30 mm	10 bar	90°C

**F<sub>n</sub>** H2o potable: yes

### FITTINGS

Dn	Nut G	Nut COMP	Nut F.I.P	Male G	Ballcock	Faucet connector M	Elbow
8	1/2" 3/8"	3/8"	1/2"	1/2" 3/8"	7/8"	10X1	1/2" 3/8"

### MATERIALS



- A. Nickel-plated brass
- B. Incorporated EPDM
- C. Stainless steel AISI304
- D. Polymer grey/black
- E. EPDM

TAQ TP Rev. 01