


TAQ SUPER ACB DN13

POLYMER CONNECTOR



Boilers and air conditioning

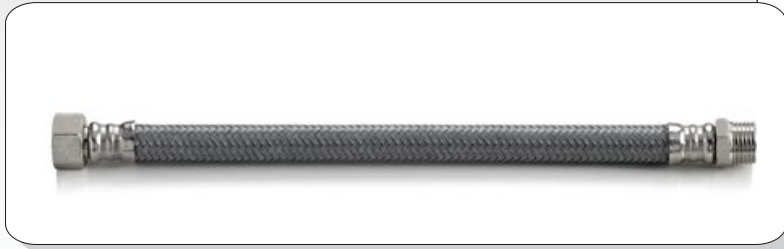

Applications

CHARACTERISTICS AND TECHNICAL SPECIFICATIONS

Dn	Outer diameter	Inner diameter	Fitting inner diameter	Flow rate	Minimum bending radius	Working pressure	Working temperature
13	19 mm	13 mm	10 mm	70 lit/mit at 3 bar	45 mm	10 bar	90°C

F_n H2o potable: yes

FITTINGS

Dn	Nut G	Male G	Elbow
13	1/2" 3/4"	1/2" 3/4"	1/2" 3/4"



MATERIALS

TAQ TP SUPER TERMO Rev. 01



- A. Nickel-plated brass
- B. Incorporated EPDM
- C. Stainless steel AISI304
- D. Polymer grey/black
- E. EPDM