


Stainless steel braided connectors

TAQ EXTRA (DN19 - DN50)



系列主要适用于取暖和空调系统。
Specially designed for heaters and air-conditioning Systems.

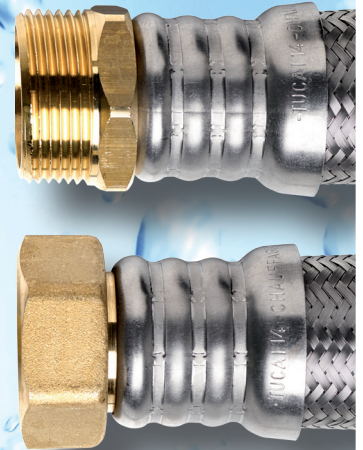

应用 Applications

Heater and air conditioning



接头 Fittings




Dn	Nut G	Male G	Elbow
19	3/4"	3/4"	3/4"
25	1"	1"	1"
30	1/4"	1" 1/4"	-
40	1 1/2"	1 1/2"	-
50	2"	2"	-

技术参数 Characteristics and technical specifications

Dn	外径 Outer diameter	内径 Inner diameter	内孔直径 Fitting inner diameter	3巴压力下流量 Flow rate	最小弯曲度 Minimum bending radius	最大工作压力 Working pressure	最高工作温度 Working temperature	饮用水 H ₂ O potable:
19	27 mm	19 mm	15 mm	120 l/min at 3 bar	70 mm	10 bar	90 °C	
25	33 mm	25 mm	20 mm	200 l/min at 3 bar	100 mm	10 bar	90 °C	
30	42 mm	30 mm	25 mm	400 l/min at 3 bar	190 mm	10 bar	90 °C	Yes
40	52 mm	40 mm	32 mm	700 l/min at 3 bar	230 mm	8 bar	90 °C	
50	62 mm	50 mm	40 mm	1.050 l/min at 3 bar	300 mm	7 bar	90 °C	

材料 Materials

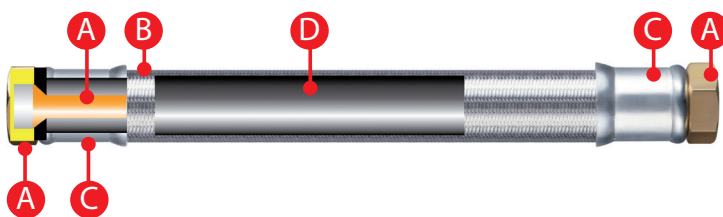

- A** 铜加镍电镀 / Nickel-plated brass
- B** 不锈钢美标304 / Stainless steel wires AISI304
- C** 美标304 / Stainless steel AISI304
- D** EPDM

* TAQ EXTRA CALORIF also available

Information subject to change without notice.

TAQ EXTRA Rev. 01