



www.tmmannerola.com


Tips for installation,
use and maintenance



TECHNICAL SPECIFICATIONS

C-850 C-851

PRODUCT

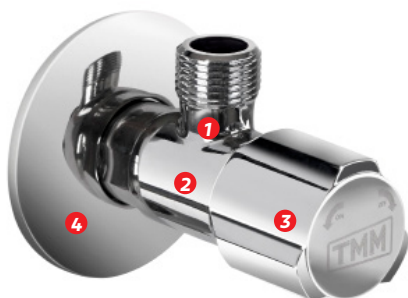

MATERIALS

- 1 BODY** CW617N brass, according to EN 12165. Chrome-plated.
- 2 CARTRIDGE** CW617N brass, according to EN 12164.
Ceramic disc closing system.
- 3 HANDLE** Metal, chrome-plated
- 4 TAILPIECE** Stainless steel

FEATURES

NOMINAL PRESSURE 16bar (PN-16).

MAXIMUM TEMPERATURE 100°C

MINIMUM TEMPERATURE 0°C

Anti-lime.

Flow rate > 33lit/min at a pressure of 3bar
according to EN-ISO 3822-2.

1/4 turn closure.

Knurled valve inlet thread.

NOTE: All the materials used to make these valves are suitable for contact with water intended for human consumption.


APPROVALS

RD 140/2003

EUROPEAN DIRECTIVE 98/83



MAIN DIMENSIONS

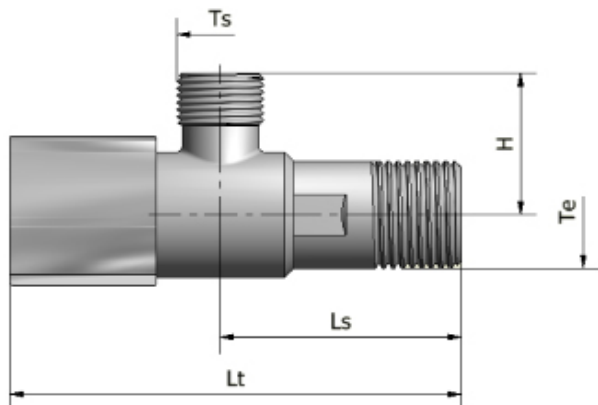

Ref.	Dimensions (mm)				
	Ts	Te	Lt	Ls	H
0400001	3/8"	1/2"	86	46	27
0400002	1/2"				
0400019	3/4"				