



www.tmmannerola.com

Tips for installation,
use and maintenance



TECHNICAL
SPECIFICATIONS

**L-400
DOUBLE**

PRODUCT



DESCRIPTION

The L-400 DOUBLE faucet is a valve used in plumbing installations. It is designed so that in a single water intake we can have two consumption points and / or connect two devices such as washing machines, dishwashers and other devices compatible with the G3 / 4 "connection thread. Each point of consumption of the valve is controlled by an independent spindle system that allows the water consumption to be opened, closed and regulated.

MATERIALS

- 1 **BODY** CW617N brass, according to EN 12165. Chrome-plated.
- 2 **SPINDLE CLOSURE** CW617N brass, according to EN 12164.
- 3 **WATER-TIGHTNESS SEAL** NBR.
- 4 **WATER-TIGHTNESS O-RING SEAL** · NBR
- 5 **HANDLE** · ABS chrome-plated.

FEATURES

NOMINAL PRESSURE 16bar (PN-16).

FLOW RATE > 55 lit/min, for a 3 bar pressure, according to EN-ISO 3822-2.

Closing with a 4-turn spindle / seat system.

Knurled valve inlet thread.


MAXIMUM TEMPERATURE 90°C.

MINIMUM TEMPERATURE 0°C


(excluded freezing).

NOTE: All materials used to manufacture these valves are suitable for contact with water intended for human consumption.

FLOW RATE VS PRESSURE

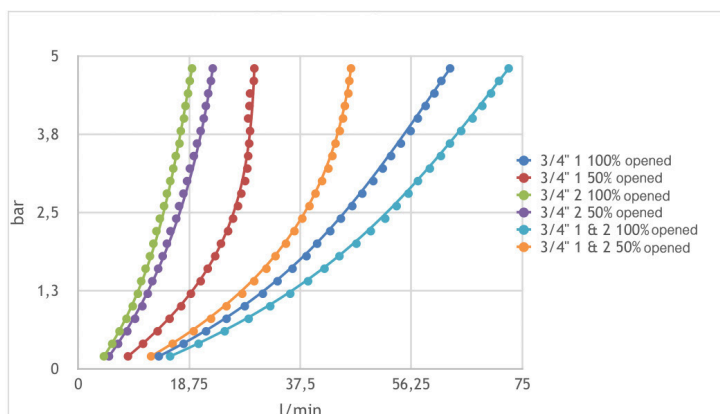

MAIN DIMENSIONS

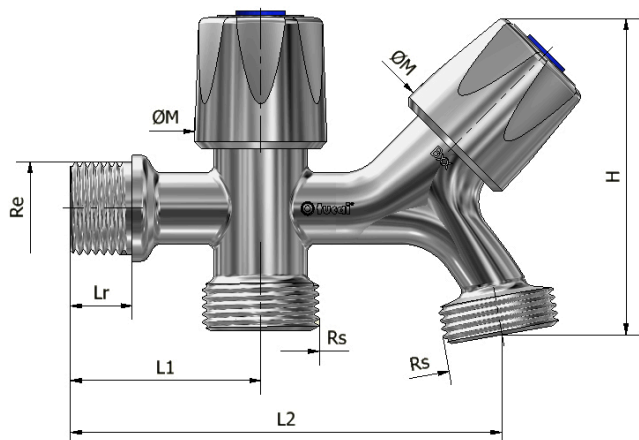

Ref.	Dimensions (mm)						
	Rs	Re	L1	L2	Lr	ØM	H
0400017	3/4"	1/2"	43	97,5	14	30	75